


VSF

300 V 70° C PVC INSULATED FLEXIBLE CONDUCTOR, SINGLE CORE

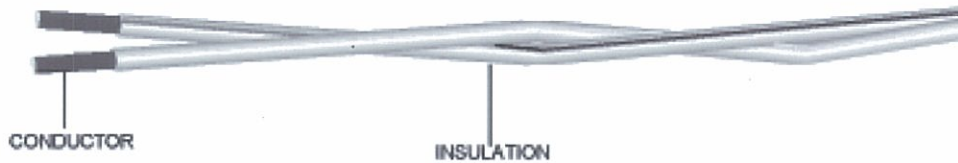

CABLE STRUCTURE

- CONDUCTOR** : Flexible stranded annealed copper wire,
Sizes. 0.5 mm² up to 2.5 mm²
- INSULATION** : PVC- Any color
- CLASSIFICATION** : Maximum conductor temperature 70°C
Circuit voltage not exceeding 300 volts
- TESTING VOLTAGE** : 2,000 Volts
- REFERENCE** : TIS 11-2531, Table 10

VSF

Number of core	Nominal cross sectional area (mm ²)	Number and diameter of wire (No/mm)	Insulation thickness (mm)	Overall diameter (mm)	Minimum insulation resistance at 70°C (MΩ -Km)	Maximum continuous current rating in free air (Ampere)	Cable weight (approx.) (Kg/Km)	Standard length (m)	Price (Baht/Meter) ราคา (บาทต่อเมตร)
1	0.5	16/0.20	0.8	3.2	0.0160	9	12	100/C	4.90
	0.5	28/0.15	0.8	3.2	0.0160	9	12	100/C	4.90
	0.75	24/0.20	0.8	3.4	0.0140	11	15	100/C	6.00
	0.75	42/0.15	0.8	3.4	0.0140	11	15	100/C	6.00
	1	32/0.20	0.8	3.6	0.0127	14	18	100/C	7.30
	1.5	30/0.25	0.8	3.9	0.0111	18	23	100/C	9.50
	2.5	50/0.25	0.8	4.8	0.0092	24	33	100/C	14.40

C : Packing in coil.